





Canada Manhole
18960 34A Ave, Surrey BC
604-968-0108
www.canadamanhole.com

TITLE: CONCRETE MANHOLE ADJUSTMENT STYLES	CMH01		10/05/2026
	DRAWING NO.		DATE.
	MK DRAWN.	MK CHECKED.	1A REVISION.

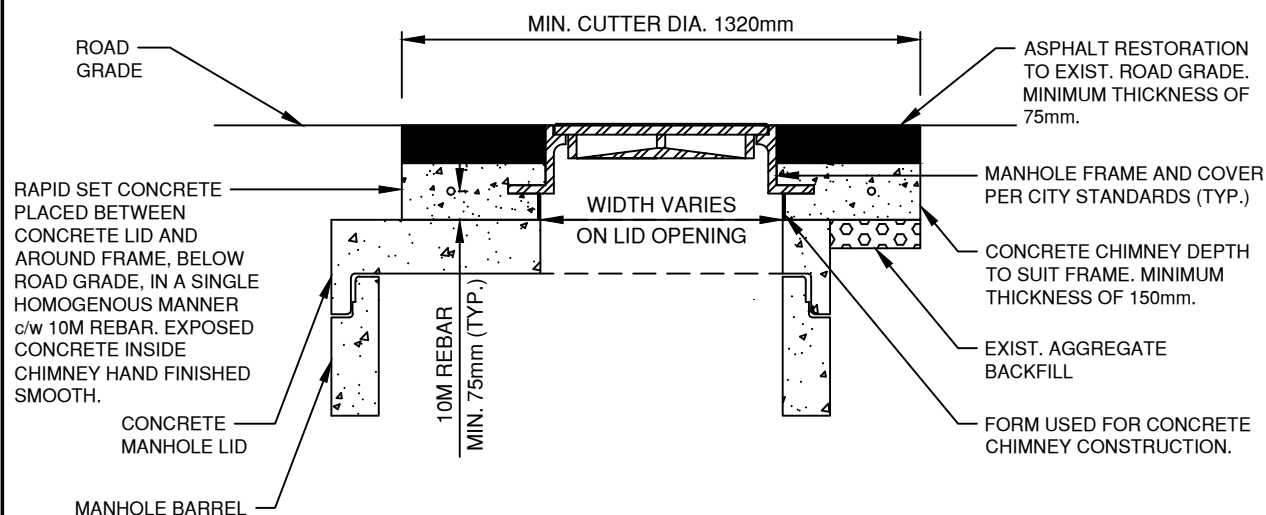

STYLE 1: RECONSTRUCTION BELOW ASPHALT GRADE

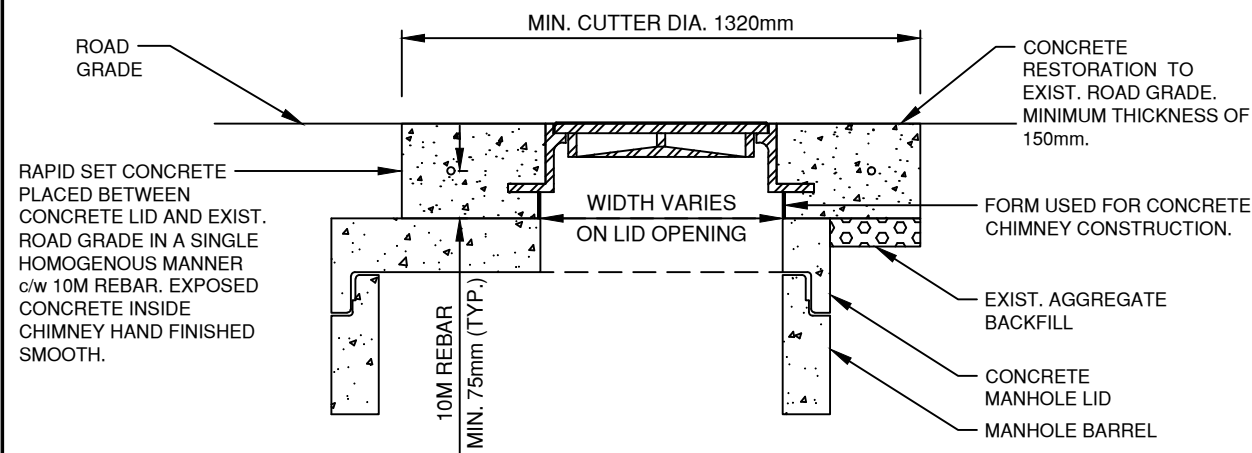

STYLE 2: RECONSTRUCTION TO FINISHED GRADE

- NOTES:
- 1. MINIMUM RAPID SET CONCRETE STRENGTH: 40 MPa AT 28 DAYS.
 - 2. ASPHALT RESTORATION TO BE UC#2 UNLESS OTHERWISE SPECIFIED.
 - 3. ADDITIONAL 10M REBAR ADDED IF CONCRETE THICKNESS EXCEEDS 300mm. MAXIMUM 150mm SPACING BETWEEN REBAR RINGS.
 - 4. FORM TO BE REMOVED FROM CHIMNEY ONCE CONCRETE SETS.